



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)

Alexander Schnell et al.)

Application No.: 10/726,542)

Filed: December 4, 2003)

For: NON-DESTRUCTIVE TESTING)
METHOD OF DETERMINING THE)
DEPLETION OF A COATING)

Group Art Unit: 1742

Examiner: SCOTT R KASTLER

Confirmation No.: 7667

SUBMISSION OF CERTIFIED COPY OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

The benefit of the filing date of the following priority foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed.


Country: EPO
Patent Application No.: 02406063.4
Filed: December 6, 2002

In support of this claim, enclosed is a certified copy of said foreign application. Said prior foreign application is referred to in the oath or declaration and/or the Application Data Sheet. Acknowledgement of receipt of this certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: July 18, 2005

By: 
Edward A. Brown
Registration No. 35,033

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

THIS PAGE BLANK (USPTO)



P.B.5818 - Patentlaan 2
2280 HV Rijswijk (ZH)
☎ +31 70 340 2040
TX 31651 epo nl
FAX +31 70 340 3016

Europäisches
Patentamt

Eingangs-
stelle

European
Patent Office

Receiving
Section

KOPIE

Office européen
des brevets

Section de
Dépôt

ALSTOM Technology Ltd
CHTI Intellectual Property
Brown Boveri Strasse 7/699/5
5401 Baden
SUISSE

CHTI Eingang		Ablage:	
01. DEZ. 2003			
SB			
Viss			

Datum/Date
27/11/03

Zeichen/Ref./Réf. B02/108-0 EP	Anmeldung Nr./Application No./Demande n°/Patent Nr./Patent No./Brevet n°. 02406063.4-2204/
Anmelder/Applicant/Demandeur/Patentinhaber/Proprietor/Titulaire ALSTOM Technology Ltd	

COMMUNICATION

concerning the registration of amendments relating to

☒ a transfer (Rule 20/Rules 61,20 EPC)

☐ entries pertaining to the applicant/the proprietor (Rule 92(1)(f) EPC)

As requested, the entries pertaining to the applicant of the above-men-
tioned European patent application/to the proprietor of the above-men-
tioned European patent have been amended to the following:

AT-BE-BG-CH-CY-CZ-DE-DK-EE-ES-FI-FR-GB-GR-IE-IT-LI-LU-MC-NL-
PT-SE-SI-SK-TR
ALSTOM Technology Ltd
Brown Boveri Strasse 7
5400 Baden/CH


The registration of the changes has taken effect on ...1.5.11.03.....

In the case of a published application/a patent, the change will be re-
corded in the Register of European Patents and published in the European
Patent Bulletin (Section I.12/II.12).

Your attention is drawn to the fact that, in the case of the registra-
tion of a transfer, any automatic debit order only ceases to be effec-
tive from the date of its express revocation (cf. point 14(c) of the
Arrangements for the automatic debiting procedure, Supplement to OJ
EPO 6/1994).

Formalities officer
Tel.: (+49-89) 2399-

Eric Bihl
tel.: 0049 (0) 89-2399/2389
Munich



THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02406063.4

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

THIS PAGE BLANK (USPTO)



Anmeldung Nr:
Application no.: 02406063.4
Demande no:

Anmeldetag:
Date of filing: 06.12.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

ALSTOM (Switzerland) Ltd
Brown Boveri Strasse 7
5401 Baden
SUISSE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

A non-destructive testing method of determining the depletion of a coating

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G01N27/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

THIS PAGE BLANK (USPTO)

5

10

15 **A non-destructive testing method of determining the depletion of a
coating**

FIELD OF INVENTION

20 The invention relates to a non-destructive testing method of determining the
depletion of a coating after the use in a high temperature environment ac-
cording to the independent claim.

STATE OF THE ART

25

Components designed for the use in the area of high temperature, e.g. blades
or vanes of a gas turbine, are usually coated with resistant coatings. The
coating protects the base material against corrosion and oxidation due to the
thermal effect of the hot environment and consists of an alloy mostly using the
30 elements Al and Cr. Most turbine components are coated for the protection
from oxidation and/or corrosion with, for example, a MCrAlY coating (overlay
coating) and some are also coated with a thermal barrier coating (TBC) for
thermal insulation. MCrAlY protective overlay coatings are widely known in the
prior art. They are a family of high temperature coatings, wherein M is se-

lected from one or a combination of iron, nickel and cobalt. As an example US-A-3,528,861 or US-A-4,585,481 are disclosing such kind of oxidation resistant coatings. US-A-4,152,223 as well discloses such method of coating and the coating itself. Besides the γ/β -MCrAlY-coating, there is another class
5 of overlay MCrAlY coatings which are based on a γ/γ' -gamma/gamma prime-structure. The advantages of γ/γ' -coatings over γ/β -coatings is that they have a negligible thermal expansion mismatch with Nickel-based superalloy of the underlying turbine article.

10 Among γ/γ' -coatings and γ/β -coatings, the field of γ/β -coatings have been an active area of research and a series of patents has been issued. E.g. a Ni-CrAlY coating is described in US-A-3,754,903 and a CoCrAlY coating in US-A-3,676,085. US-A-4,346,137 discloses an improved high temperature fatigue resistance NiCoCrAlY coating. US-A-4,419,416, US-A-4,585,481, RE-32,121
15 and US-A-4,743,514 describe MCrAlY coatings containing Si and Hf. US-A-4,313,760 discloses a superalloy coating composition with good oxidation, corrosion and fatigue resistance.

In contrast to the γ/β -coatings, the γ/γ' -type of MCrAlY coatings, known e.g.
20 from US-A-4,973,445, are relatively new. The unique feature of this type of γ/γ' -coatings is that their thermal expansion mismatch is close to zero in combination with a high ductility, what make these coatings more resistant to thermal fatigue. However the limitations at elevated temperature are the lower aluminum content compared to γ/β -coatings.

25 For coatings the in-service degradation of the coating is one of the key factors for setting the time schedule for the periodic maintenance of gas turbines. In this context quantitative non-destructive characterization of high-temperature coating is an arising interest both to assess the quantity of the coating in the
30 "as applied" condition and to obtain objective data on coating operational degradation that can be used to optimize blade refurbishment cycles.

Many services exposed turbine component are metallurgical investigated because the of the main question of coating degradation. Non-destructive Testing (NDT) method can provide essential information, such as residual coating lifetime, coating thickness distribution and any kind of delamination defects. NDT methods lower the need of time and cost consuming destructive metallurgical investigations. However due to the variability of the microstructure γ/γ' -coatings the applicability of NDT eddy current methods for estimating the effective thickness of service exposed coatings is not straight forward.

During an engine stop from the operating temperature down to below 600°, the γ/γ' MCrAlY-coating exhibits a non-equilibrium γ/γ' -microstructure at room temperature due to the rapid cooling. Equilibrium phases, which are stable at low temperatures such as the α -Chromium phase, can not re-precipitate. The non-equilibrium microstructure of the coating results in a modified coating conductivity, which makes a reliable NDT coating assessment using the multifrequency eddy current method impossible.

SUMMARY OF THE INVENTION

It is object of the present invention to find a heat treatment for service-exposed GT blading components with γ/γ' -coating to be able to subsequently apply a non-destructive testing method which is capable of determining the Al and/or Cr depletion within the γ/γ' -coating.

According to the invention a method of a heat treatment was found which enables the measurement of the depletion of Al and Cr of a γ/γ' MCrAlY-coating. The inventive method comprising the steps of

- (a) applying a defined annealing heat treatment to the γ/γ' MCrAlY-coated component to transform the non-equilibrium high temperature γ/γ' -microstructure into the equilibrium room temperature microstructure with a α -Cr phase,

- (b) measuring the coating electrical conductivity and magnetic permeability of the MCrAlY-coating by means of a multi-frequency eddy current system and
- (c) determining the Al and/or Cr depletion of the coating from the coating conductivity and permeability.

From the Al and/or Cr depletion of the coating the remaining life-time of the coating can be determined.

- 10 For a coating consisting of (wt.-%) 25% Cr, 5.5% Al, 1% Ta, 2.6% Si, 0.5%Y, Rest Ni and unavoidable impurities a transformation heat treatment, which guarantees the full restoration of the equilibrium condition of the coating, must be applied.
- 15 A heat treatment at temperatures above 1000°C for at least 2 hours with a subsequent controlled cooling rate of 2-10K/min from the heat treatment temperature down to below 800°C is required to guarantee the formation of the equilibrium microstructure. A long-term exposure at temperatures between 800° - 870° C for 16 to 24 hours can also be applied for the restoration of
- 20 microstructure.

BRIEF DESCRIPTION OF DRAWINGS

This invention is illustrated in the accompanying drawing, in which

25

Fig. 1 shows a turbine blade,

Fig. 2 shows the coating structure after exposure with rapid cooling afterwards resulting in non- equilibrium microstructure,

Fig. 3 shows the coating structure after the new annealing temperature resulting in an equilibrium microstructure and

30

Fig. 4 illustrates a schematic drawing of a multifrequency eddy current system.

The drawings show only parts important for the invention.

DETAILED DESCRIPTION OF INVENTION

As an example Fig. 1 shows an article 1 such as blades or vanes of gas turbine engines, the gas turbine blade comprising a root portion 2, a platform 3 and a blade 4 and cooling holes 5. On the external surface 7 a MCrAlY-coating 6 is applied. The component can be made from a Nickel base superalloy known in the state of the art, e.g. from the document US-A-5,888,451, US-A-5,759,301 or from US-A-4,643,782, which is known as "CMSX-4".

The invention relates to a method for estimating the thickness and the depletion of protective elements such as Al and Cr of a high temperature MCrAlY-coating 6 – like for example SV 20 coating – after the use of this component in a high temperature environment.

The chemical composition (wt.-%) of the SV20-MCrAlY coating, which is known from DE-C1-37 40 478 or US-A-4,973,445, is shown in Table 1:

Coating	Ni	Cr	Al	Ta	Si	Y
SV20	Balance	25	5.5	1	2.6	0.5

Tab. 1

After the standard heat treatment (1120°C/2h + 870/20h) the SV20 coating shows a microstructure consisting of a γ -Ni-matrix with the Al rich γ' phase and Cr-rich α -Cr phase. The equilibrium volume fraction of the α -Cr phase in the initial state SV20 is approximately 20%. The γ' phase is the Al reservoir phase for the formation of alumina to protect against high temperature oxidation above 900°C. The α -Cr phase is the Cr reservoir phase for the formation of Cr-Oxide to protect against low temperature oxidation and corrosion.

Unlike a MCrAlY with a γ/β -structure, which is stable on a wide temperature range, the microstructure of the non-depleted SV20 coating is strongly dependent on the temperature the component is subjected to during operation. Besides the microstructural changes in the non-depleted SV20 coating as a

function of the operating temperature also the oxidation and outer depletion behaviour of the SV20 changes with temperature.

At temperatures between 750° and 900°C the SV20 coating consists of the γ -
5 Ni-matrix, the γ' and the α -Cr phases. The SV20 coating does not show a significant microstructural change during cooling from temperatures below 850°C down to Room temperature (RT). Mainly chromium-oxide forms at the outer surface of the SV20 coating which leads to a chromium depleted layer in the SV20 coating. The degradation level of the SV20 coating can be metal-
10 lographically investigated by measuring the loss of α -Cr phase in the coating. The coating is considered exhausted (conservative approach) when a Cr content lower than 12-15 wt % is reached.

At temperatures above 900°C the α -Cr phase starts to dissolve and with in-
15 creasing temperature and time the fraction of the α -Cr phase decreases permanently until the α -Cr phase is completely dissolved. The cooling rates during an engine stop are generally too high for a re-precipitation of the α -Cr phase. This means that the microstructure of a SV20 coating, which was subjected to temperatures higher than 900°C, shows a lower α -Cr phase
20 content compared to its equilibrium condition. The SV20 coating depletes at this temperature mainly from Al as the SV20 coating forms Al-oxides as the protective oxide scale. The degradation level of the SV20 coating above 900°C can be metallographically investigated by measuring the thickness of the γ' free layer. The coating is considered exhausted when an Al content
25 lower than 3 wt % is reached.

At elevated temperatures of above 1000°C a phase transformation according to $\alpha + \gamma' \leftrightarrow \beta + \gamma$ takes place. The α -Cr phase is entirely dissolved and the γ and Al-rich β phase are in an equilibrium condition. During an engine stop the
30 cooling rates are generally too high for a complete re-transformation to the equilibrium microstructure at RT. Such SV20 coatings, which were subjected to temperatures above 1000°C in service, show a non-equilibrium microstructure at RT consisting of all four phases: $\alpha + \gamma' + \beta + \gamma$.

In order to assess the influence of the presence, fraction and size of the α , γ' , β phases in the γ -matrix on the conductivity and permeability of the SV20 coating, tests were performed on the following two sets of samples:

5

Set1. 6 samples of "as applied" SV20/MarM247 (subjected to the standard heat treatment at 1120°C/2h + 870°C/20h) were annealed for 60 hours at the following temperatures: 800°C, 850°C, 900°C, 950°C, 1000°C and 1050°C. All samples were then quenched in air resulting in high cooling rates in order to
10 maintain the non-equilibrium γ/γ' -microstructure at room temperature. Fig. 2 shows the structure of the coating after exposure to above mentioned heat treatments.

Set2. 6 samples of "as applied" SV20/MarM247 were treated as the previous
15 set1 samples, and afterwards subjected to an additional heat treatment at 800°C for 20h. The additional heat treatment allowed the SV20 coatings with non-equilibrium γ/γ' -microstructure to re-transform to the equilibrium microstructure with a α -Cr phase. Fig. 3 shows the structure of the coating after the new annealing temperature resulting in an equilibrium microstructure.

20

Both sets of SV20 samples were measured before and after the long-term exposure at several temperatures using a multifrequency eddy current system as described as an example in Antonelli, G., Crisafulli, P., Tirone, G., 2001, "Qualification of a Frequency Scanning Eddy Current Equipment for Nonde-
25 structive Characterization of New and Serviced High-Temperature Coatings", ASME paper No. 2001-GT-0419 and Antonelli, G., 2002, "Non-Destructive Condition Assessment of MCrAlY Coatings", presented at Turbine Forum on Advanced Coatings for High Temperatures, Nice, France. This system was developed for non-destructive condition assessment of new and service ex-
30 posed high-temperature coatings applied on the hot gas-path components of land-based gas turbines.

A schematic view of the system is given in Fig. 4. It is a portable system consisting of following modules:

- Probe with combined or separated transmit-receiver coils,
- Eddy current frequency scanning range from 100 kHz to MHz,
- 5 • Feeding and conditioning unit with high sensitivity and high stability,
- Computer based data analysis unit and
- Display unit

10 The system fully exploits the capabilities of multiple-frequency eddy current techniques in the characterisation of multiple-layer materials, based on the evaluation of even quite small differences in the electrical conductivity values of the different layers.

15 The influence of the non-equilibrium microstructure from the coatings aged above 900°C on the eddy current data is significant. Those coatings seem to be heavily depleted and degraded due their non-equilibrium structure. With increasing ageing temperature the fraction of the α -Cr phase decreases permanently which results in a lower normalised impedance curve obtained by the frequency scanning eddy current system. At temp. >950°C the β phase
20 occurs which then results again in an increase of the normalised impedance curve. The normalised impedance curve for the 950°C-exposed sample is the lowest. After the additional heat treatment at 800°C/20h, resulting in a re-transformation of the non-equilibrium to the equilibrium microstructures, the normalised impedance curves return to be similar to ones obtained the as-
25 applied condition.

The above qualitative analysis of the impedance curves is confirmed by model based analysis of the impedance curves giving estimates for coating and substrate conductivity. There is a strong dependence of the coating conductivity on the exposure temperature as estimated by the frequency scanning
30 eddy current system, especially in the range from 800°C to 950°C, where electrical conductivity correlates well with Cr dissolution. This effect poses a problem in the interpretation of eddy current data from service exposed

blades. The coating conductivity depends on two effects, of which only the first is related with real coating consumption:

- Cr-depletion as a consequence of coating oxidation (depletion effect);
- 5 • α -Cr dissolution as a consequence of non-equilibrium microstructures obtained at different operating temperatures (microstructural effect).

Therefore an estimation of the effective remaining coating thickness by the eddy current technique is only possible with a certain accuracy if the SV20
10 MCrAlY coating is brought back to its equilibrium microstructure by applying an annealing treatment whereas estimation of the exposure temperature can be performed if the degradation is known (e.g. no degradation for short exposure time). From the Al and/or Cr depletion of the coating the remaining life-time of the coating can be determined.

15

At temperatures higher than 900°C, where the degradation mechanism is Al depletion, the capability of the eddy current technique to grade coating depletion was not investigated. However problems are expected due to:

- non monotonic conductivity dependence on the exposure temperature;
- 20 • the low Al content in the coating and the low conductivity variation expected from its complete depletion (from 5.5 wt.-% in the new coating to below 3 wt.-% in the exhausted coating).

The observation that the additional heat treatment aiming at re-transforming
25 the coating to its equilibrium microstructure cancels the microstructural effect on coating conductivity can be exploited by applying an additional heat treatment to the samples before testing them with the eddy current technique.

For the material tested such heat treatment according to the present invention
30 can be at temperatures above 1000°C for at least 2 hours with a subsequent controlled cooling rate of 2-10K/min from the heat treatment temperature down to below 800°C in order to guarantee the formation of the equilibrium

microstructure. A long-term exposure at temperatures between 800° - 870° C for 16 to 24 hours can be applied for the restoration of microstructure.

While our invention has been described by an example, it is apparent that
5 other forms could be adopted by one skilled in the art. Accordingly, the scope
of our invention is to be limited only by the attached claims.

REFERENCE LIST

- | | | |
|----|---|-------------------------------|
| | 1 | Article |
| 10 | 2 | Root portion |
| | 3 | Platform |
| | 4 | Blade |
| | 5 | Cooling holes |
| | 6 | Coating |
| 15 | 7 | External surface of article 1 |

CLAIMS

1. A method of determining the depletion of Al and Cr of a γ/γ' MCrAlY-coating after the use in a high temperature environment, the γ/γ' MCrAlY-coating applied to a component exhibiting a non-equilibrium γ/γ' -microstructure at a temperature lower than the temperature during operation, the method comprising the steps of
 - (a) applying a defined annealing heat treatment to the γ/γ' MCrAlY-coated component to transform the non-equilibrium high temperature γ/γ' -microstructure into the equilibrium room temperature microstructure with a α -Cr phase,
 - (b) measuring the coating electrical conductivity and magnetic permeability of the MCrAlY-coating by means of a multi-frequency eddy current system and
 - (c) determining the Al and/or Cr depletion of the coating from the coating conductivity and permeability.
2. The method according to claim 1, wherein from the Al and/or Cr depletion of the coating the remaining life-time of the coating is determined.
3. The method according to any of the claims 1 to 3, wherein the method is applied for a coating consisting of (wt.-%) 25% Cr, 5.5% Al, 1% Ta, 2.6% Si, 0.5%Y, Rest Ni and unavoidable impurities.
4. The method according to any of the claim 1 or 4, wherein a transformation heat treatment at a temperature of 800° - 870° C for 16 to 24 h is applied.
5. The method according to any of the claim 1 or 4, wherein after the operation the coating is heat treated with a temperature above 1000°C for at least 2 hours with a subsequent controlled cooling rate of 2-10K/min from the heat treatment temperature down to below 800°C to transform the microstructure.

THIS PAGE BLANK (USPTO)

ABSTRACT

It is disclosed a method of measuring the thickness and/or the depletion of Al and Cr of a γ/γ' MCrAlY-coating after the use in a high temperature environment, the γ/γ' MCrAlY-coating (6) exhibiting a non-equilibrium γ/γ' -microstructure at a temperature lower than the temperature during operation. Before the coating (6) conductivity by means of a multifrequency eddy current system is measured a heat treatment is applied to transform the non-equilibrium γ/γ' -microstructure to a equilibrium microstructure having a α -Cr phase. Subsequently the Al and/or Cr depletion of the coating (6) from the coating conductivity and permeability is determined.

(Fig. 1)

THIS PAGE, BLANK (USPTO)

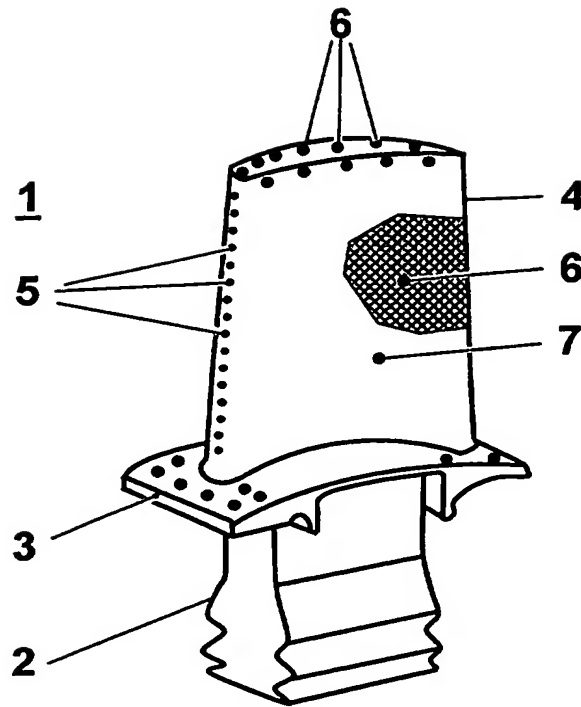


Fig. 1

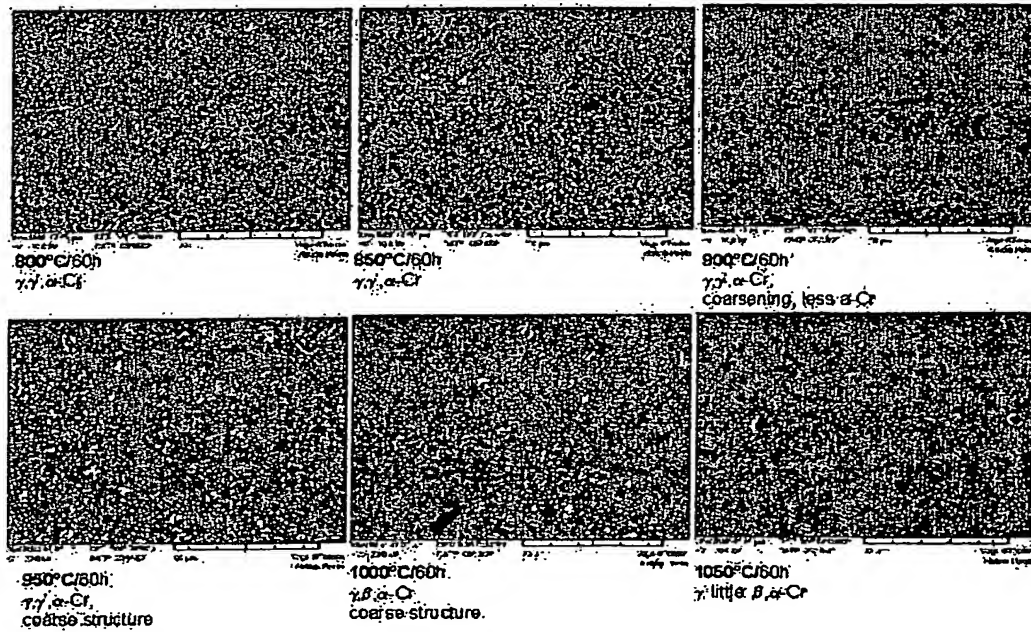


Fig. 2

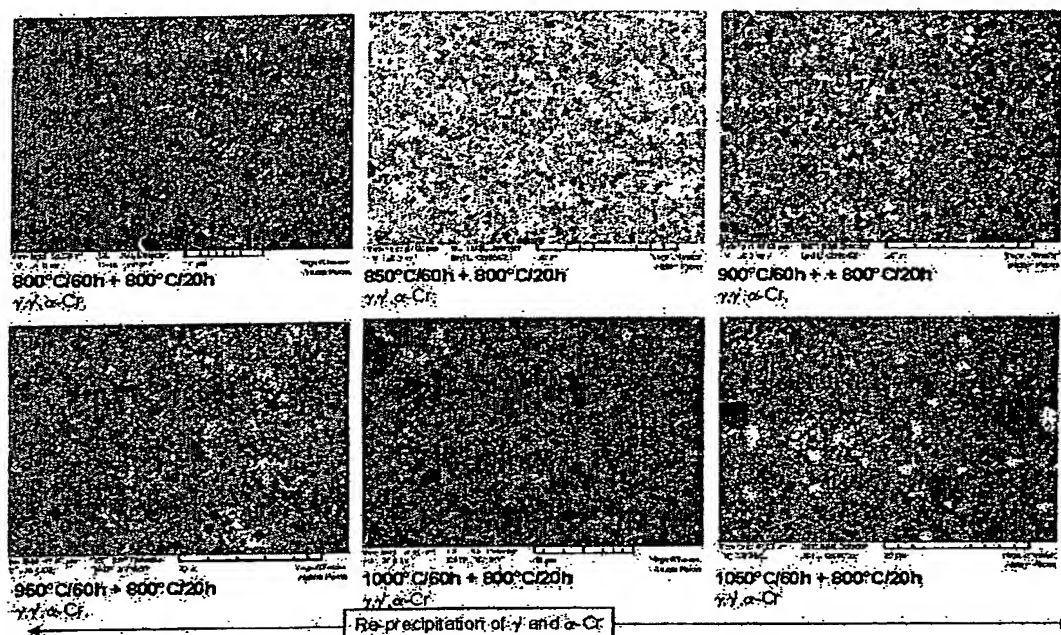


Fig. 3

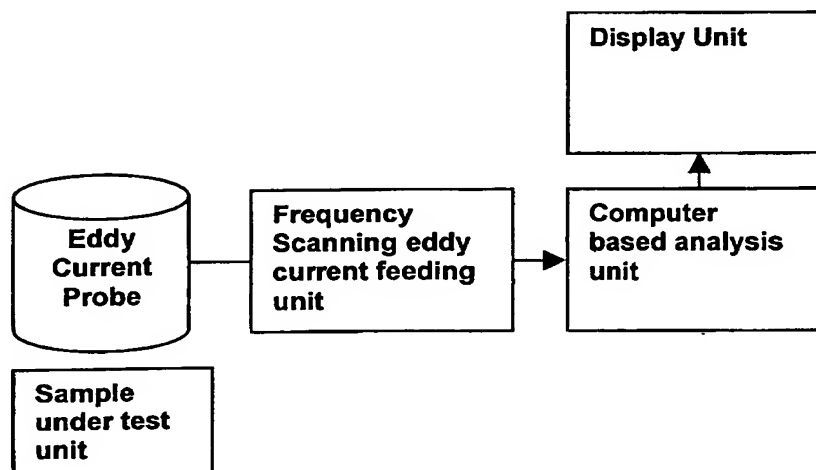


Fig. 4